


FEATURES:

- Input: AC 100-120V or 200-240V~ 50/60Hz
- Electrical Type: Isolated Power Supply, Class II
- Power: 3-15 Watts
- Ovp, ocp, scp and Over load protection
- Stroboscopic coefficient <1%.
- Efficiency level: VI, standby power<0.5W
- Dimension: 79*33*24.0mm
- Application: Lighting field: indoor office lighting, decorative lighting, business lighting, home lighting.

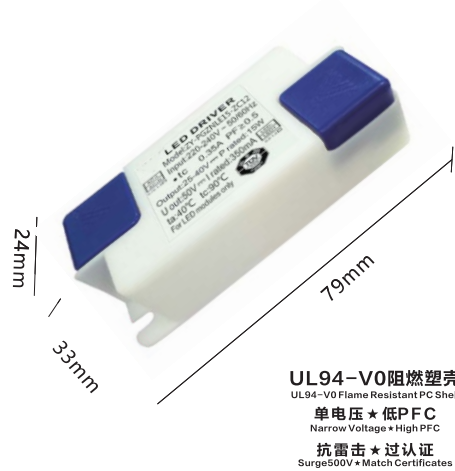

SAFETY:

SAFETY:	
Safety Standard	UL 61347, IEC 61347, EN 61347-1:2015
Safety Approval	UL/cUL, CE, FCC, UKCA, PSE, CB, SAA, KC, TUV
EMC Standard	EMC EMISSION: EN55015 class B (CISPR32), EN61000-3-2,-3, EAC TP TC 020 EMC IMMUNITY: EN61000-4-2,3,4,5,6,8,11, EN61547; light industry level, criteria A, EAC TP TC 020
MTBF	50K hrs min. MIL-HDBK-217F (25°C)

MODEL LIST:

产品型号 (Model)	输出功率 (W)	输入电压 (AC·V)	输出电压 (DC·V)	输出电流 (mA)	输出效率 (EFF)	功率因数 (PFC)	尺寸 (L*W*H)	认证 (CERT)
ZY-PGZNLE7-ZD7	3-7W	220-240	9-24V	175-300	75% (230Vac)	0.5 (230Vac)	79*33*24	CE/CB/ ENEC/UKCA
ZY-PGZNLE7-ZD12	3-7W	220-240	25-40	75-175	76% (230Vac)	0.5 (230Vac)	79*33*24	CE/CB/ ENEC/UKCA
ZY-PGZNLE12-ZD12	8-12W	220-240	25-45	200-300	80% (230Vac)	0.5 (230Vac)	79*33*24	CE/CB/ ENEC/UKCA
ZY-PGZNLE15-ZD15	8-15W	220-240	25-45	175-330	80% (230Vac)	0.5 (230Vac)	79*33*24	CE/CB/ ENEC/UKCA
ZY-PGZNLE15-ZD12	13-15W	220-240	25-40	325-375	80% (230Vac)	0.5 (230Vac)	79*33*24	CE/CB/ ENEC/UKCA

Mechanical Diagram